
Peripheral Camera, (KA4),(KA6)

From June 2011



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



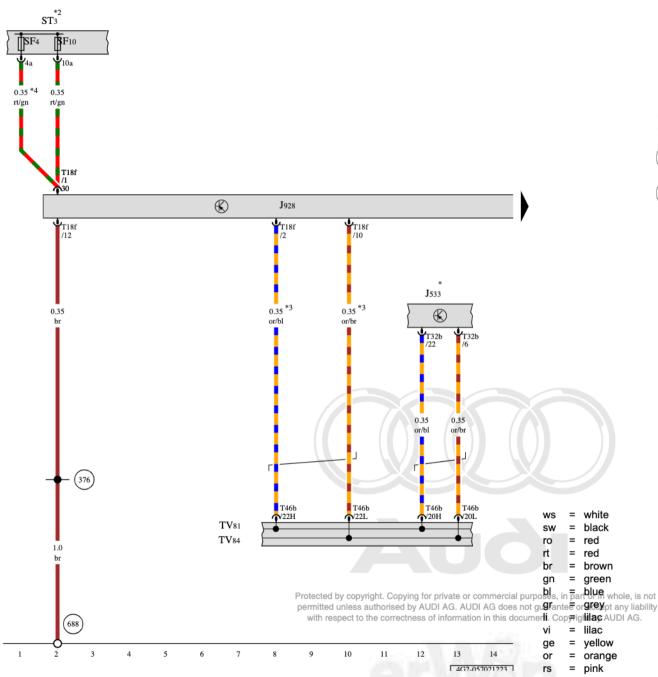


Peripheral Camera Control Module

- J533 Data Bus on Board Diagnostic Interface
- J928 Peripheral Camera Control Module
- ST3 Fuse Panel 3
- SF4 Fuse 4 (On Fuse Panel F)
- SF10 Fuse 10 (On Fuse Panel F)
- T18f 18-Pin Connector
- T32b 32-Pin Connector
- T46b 46-Pin Connector
- TV81 Instrument Cluster CAN Bus High Wire Junction 2
- TV84 Instrument Cluster CAN Bus Low Wire Junction 2
- 376 Ground Connection 11 (in Main Wiring Harness)
- (688) Ground Connection 2 on Center Tunnel
- * Refer to Applicable Wiring Diagram for Data Bus Networking
- *2 Refer to Applicable Wiring Diagram for Fuse Positions
- *3 Data Bus Wire (CAN Bus)
- *4 From June 2014

Peripheral Camera Control Module

- J794 Information Electronics Control Module 1
- J928 Peripheral Camera Control Module
- T2lt 2-Pin Connector T12c 12-Pin Connector
- T12g 12-Pin Connector
 - * Refer to Applicable MMI (Information Electronics) Wiring
- *2 For Vehicles with RMC Radio System

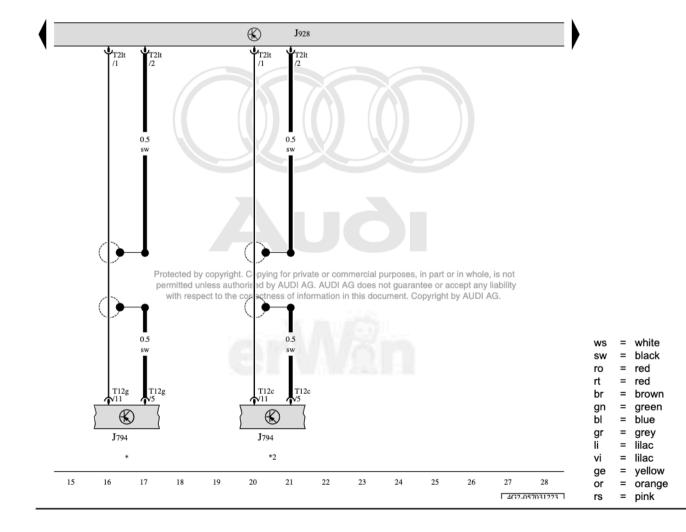

(K) J928 Ψ_{T5av} T5aw T5bt T5aq T5bt T5bt 1/1 T5aq 0.14 * 1.0 0.14 * 0.14 * 0.14 * 0.14 * 0.14 0.14 br Protected by opyrigh Copying or priva or compercial purposes, in part or whole, not AUDI A does not guarantee or acc is document. Copyright by of info T5an //2 T5an 1/3 T5ap T5ap T5ap * 0.14 * 0.14 0.14 1.0 0.14 0.14 0.14 0.14 T5ar T5ar √2 T5as T5ar V4 T5ar T5as T5as V4 T5as T5ar T5as **® ®** R244 R245 31 32 33 35 39 41 4G2-057041223

Peripheral Camera Control Module, Left Peripheral Camera, Right Peripheral Camera

J928 Peripheral Camera Control Module

R244 Left Peripheral Camera

R245 Right Peripheral Camera
T5an 5-Pin Connector, In the Driver Door

T5ap 5-Pin Connector, In the Front Passenger Door

T5ag 5-Pin Connector, On the Right A-Pillar

5ar 5-Pin Connector

T5as 5-Pin Connector

T5av 5-Pin Connector

T5aw 5-Pin Connector

= white = black = red = red

= brown = green

= blue = grey

= lilac = lilac = yellow

= orange

= pink

rs

T5bt 5-Pin Connector, On the Left A-Pillar

Depending on Equipment

Wiring Diagram

No. 57 / 5

Peripheral Camera Control Module, Front Peripheral Camera, Rear Peripheral Camera

J928 Peripheral Camera Control Module

R243 Front Peripheral Camera

R246 Rear Peripheral Camera

T5at 5-Pin Connector

T5au 5-Pin Connector

T5ax 5-Pin Connector

T5ay 5-Pin Connector

T5az 5-Pin Connector, In the Front Bumper, Left

